Print on plain white paper - Part # 122919

INSTALLATION INSTRUCTIONS

Replacement Light Switch (Kit 153248)

DANGER: Turn off all electrical power at the power source before making electrical connections.

1. INSTALLING THE NEW SWITCH

1. Remove the light switch cover by removing the two cover screws
2. Disconnect the Black and Gray wires and remove the on/off switch by pressing the tabs on the bottom and top of the switch.
3. Insert the new 3 position switch in the slot where the on/off was located.
4. Plug the black wire to the top position on the new switch and plug the gray wire to the middle position. Plug the new red wire to the bottom position.
5. Attach the connector to the black composite switch wire and insert the new red wire into the connector.
6. Fold the connector tab over and press the conductor blade in to the wires.
7. Replace the switch cover.

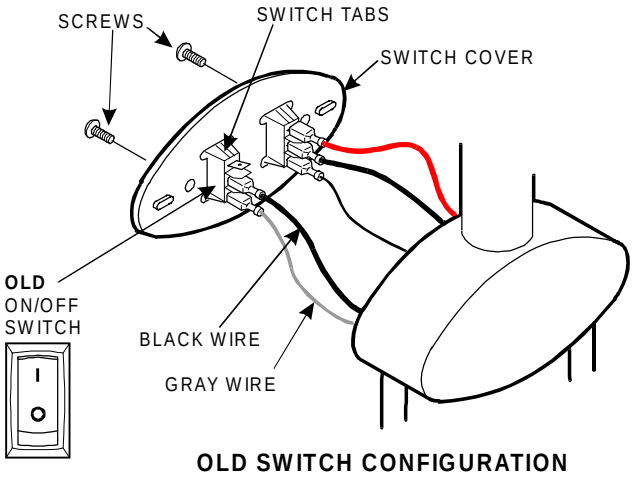

OLD SWITCH CONFIGURATION

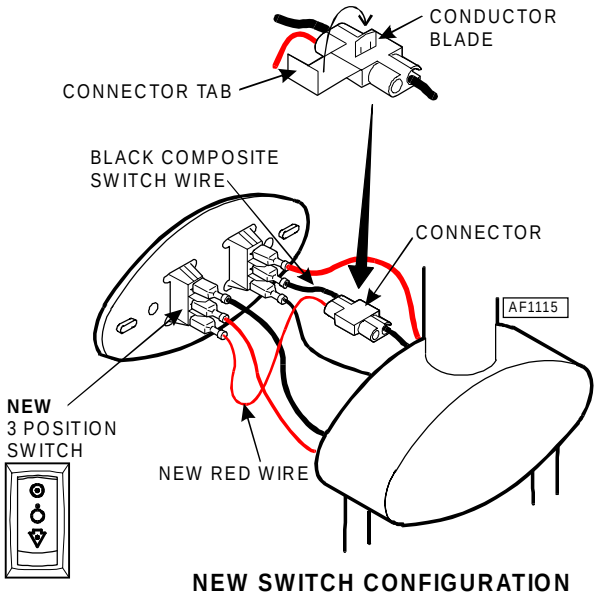

NEW SWITCH CONFIGURATION

Knight®
by Midmark

Midmark Corporation • P O Box 286 • 60 Vista Drive
Versailles • Ohio • 45380-0286 • www.midmark.com
Phone: 937-526-3662 Fax: 937-526-5542